



SM-5100

Scale Printer

Powerful Features in a Compact Scale Printer



SM-5100B



SM-5100P



SM-5100EV



SM-5100BS

**Searching for
a New Balance**


SM-5100 —

versatile scale printer for store operations

Weigh quickly , print rapidly to increase throughput.

SM-5100 designed to meet the weighing needs of any retail store.

This Series provides the best value for your store's operation.

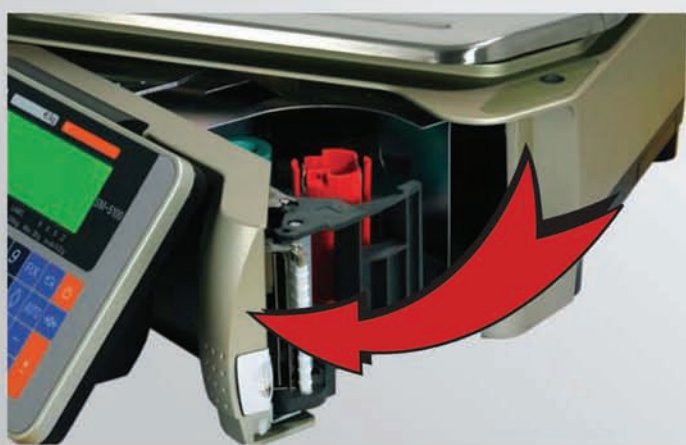

Easy to Change Label & Receipt

Changing the thermal paper roll is easy through the large opening in the scale housing which enables quick loading of the label or receipt roll.

Compact Design for Save Space

Effective use of sales space, shorten the distance of communication with customer.



Free Angle of Operator Panel and Water Resistant Keyboard

Free angle adjustment of operator panel for easy operation. Water resistant membrane keyboard stands up to frequent use.



Large & Clear Display


Customer and operators can easily read the bright alpha-numeric LCD with back-light.

Large characters display the product name or scroll messages for promotions or store specials.

POWERFUL COMMUNICATION CAPABILITIES STANDARD

- Through the standard Ethernet or RS-232 interface, inter-scale and store controller communication is readily available.
- With the Wireless LAN network interface, scale installation locations can quickly change without added costs.
(wireless network card is optional.)
- Quick weight stabilization and fast label / receipt printing allows the operator to serve more customers and increase volume of the operation.
- Barcode Scanner can also be connected to enhance the operation.
- Nutritional facts and traceability information can be easily designed and printed for better customer service.

External Dimensions (mm)

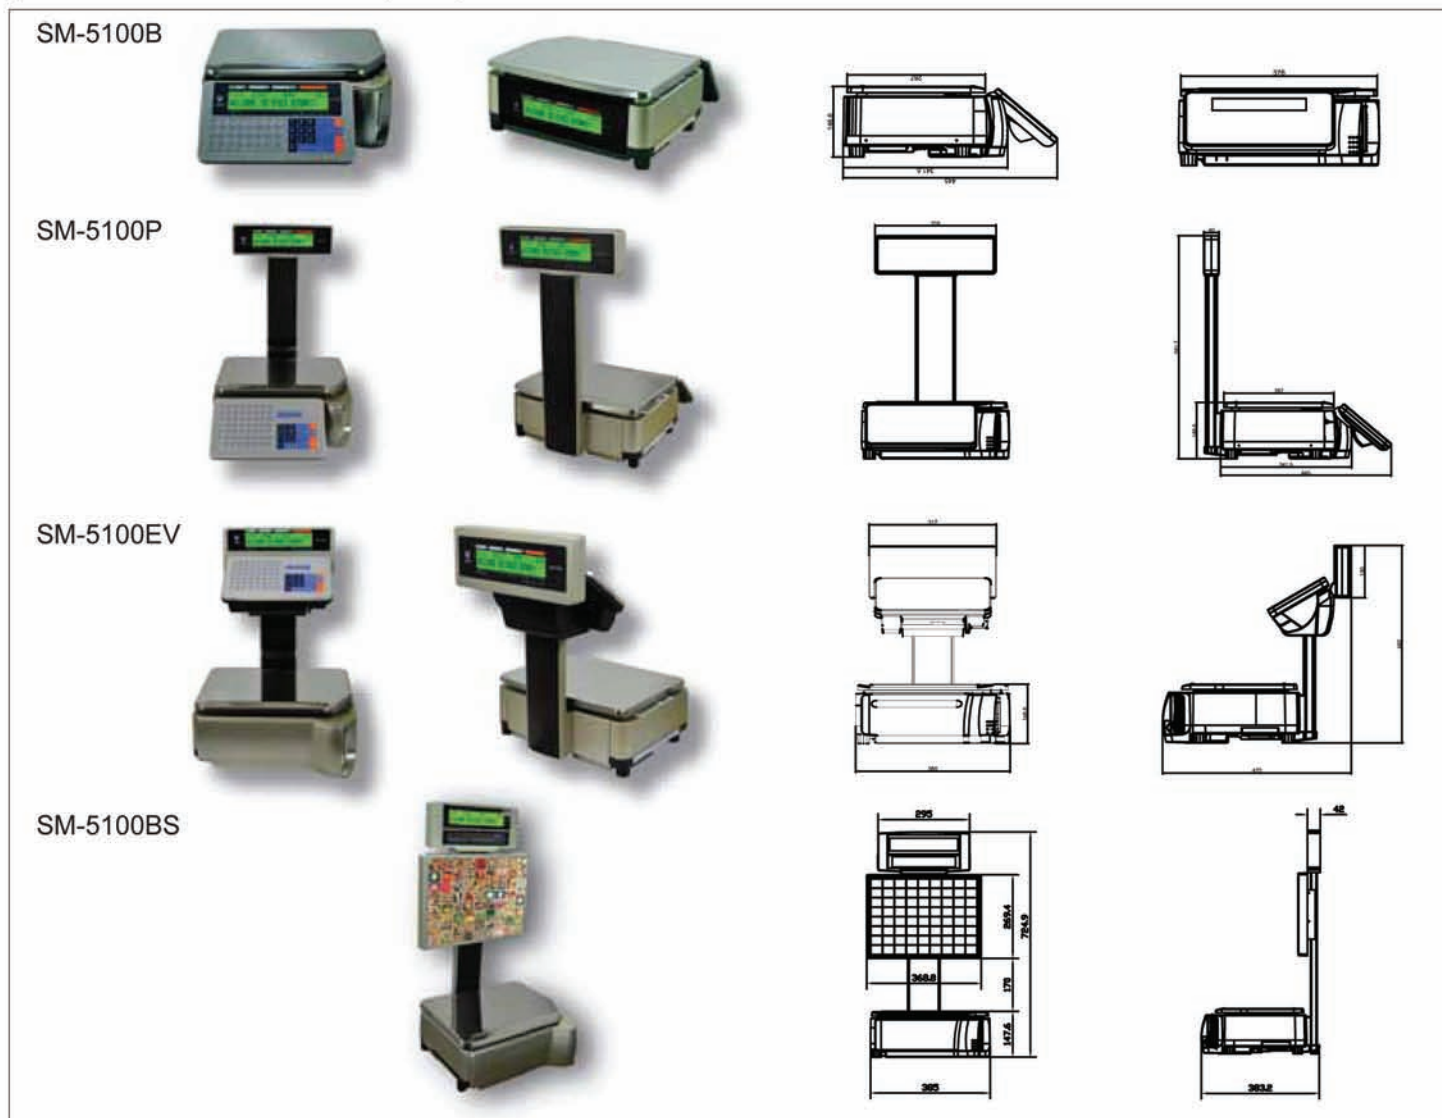

Basic Specifications

Model	SM-5100B	SM-5100P	SM-5100EV	SM-5100BS
Capacity	Max 3 / 6 kg		Max 6 / 15 kg	Max 15 / 30 kg
Interval	e = 1 / 2 g		e = 2 / 5 g	e = 5 / 10 g
Display	32 x 202 Full Dot Matrix LCD with Back-Light (Top Row : 5 x 10 Dots / Character , Bottom Row : 7 x 12 Dots / Character)			
Number of Preset Keys	32	56	56	72
Memory Capacity	1MB (Standard) 2MB (Option)			
Display Resolution	1 / 3,000			
Paper Width	Max 60 mm (Label) 60 mm (Receipt)			
Printing Speed	80 mm/sec (Label) 105 mm/sec (Receipt)			
Label Size	Maximum 60 (W) x 220 (L) mm			
Power Source	AC 100 / 110 / 220 / 230 / 240 Volts (50 / 60 Hz.)			
Operating Temperature	-10 °C to +40 °C			
Standard Interface	RS232C, Ethernet, Cash Drawer I/F			
Optional Interface	Wireless LAN I/F (IEEE 802.11b/g)			
Dimensions (mm) (W) x (D) x (H)	376 x 445 x 146.6	385 x 445 x 581.7	385 x 470 x 492	385 x 383.2 x 724.9
Net Weight	10.7kg	12.6kg	14.1kg	16kg

*Specifications are subject to change without prior notice.

DIGI Belgium nv

Neerlandweg 7
2610 Wilrijk
België
TEL: +32 3 325 81 01
FAX: +32 3 325 85 88
www.digieu.eu

DIGI Nederland bv

Impuls 73-75
1446 BC
Nederland
TEL: +31 299 405 555
FAX: +31 299 642 581
www.digieu.eu