



DS-781\782

Price Computing & Check-Out Scale

Green Scale , Save Environment

Extremely Low Power Consumption
Reliable & Compact Design
High Contrast LCD Display (DS-781)
Intelligent Backlight (DS-782)
Stainless Steel Flat Platter



DS-781P






DS-782B




***Searching for
a New Balance***

External Dimensions(mm)

DS-781B
DS-782B

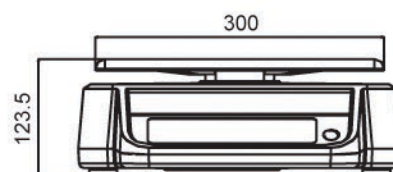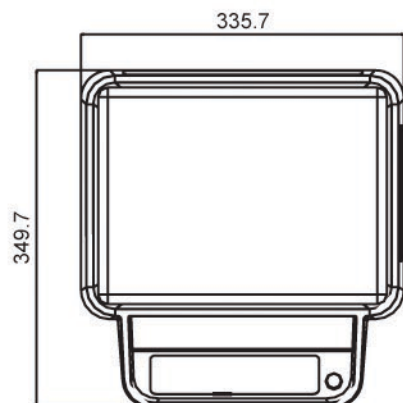

DS-781P
DS-782P

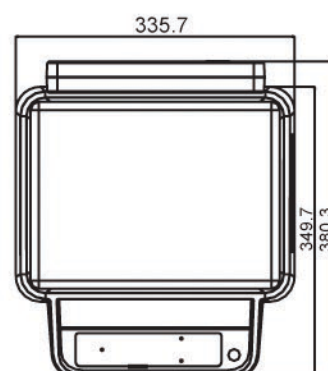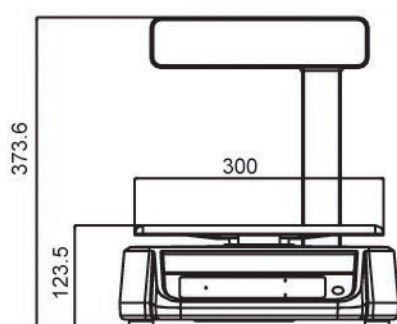

Basic Specifications

Model	DS-781B	DS-781P	DS-782B	DS-782P
Capacity	3kg, 6kg, 15kg, 30kg, 6lb, 15lb, 30lb and 60lb			
Power Source	AC: Adapter(DC 5V ~ 8V, 100mA) DC: 4 x C size dry battery or AC/DC		AC: 240/230/220V, 117/100V (Factory Optional) DC: 6V 5Ah rechargeable battery (Optional)	
High Contrast LCD	YES			
High Contrast LCD (Backlight)	NO		YES	
Resolution	1/3,000			
RS-232C Interface	Optional			
Operating Temperature	-10℃～+40℃			
Operating Humidity	15～85%RH			
Power Consumption	AC: 0.12W when using dry battery DC: 0.24W when DC 6V		AC: 18W when using AC power DC: 1.2W when using rechargeable battery	

*Specifications are subject to change without prior notice.

DIGI Belgium nv

Neerlandweg 7
2610 Wilrijk
België
TEL: +32 3 325 81 01
FAX: +32 3 325 85 88
www.digieu.eu

DIGI Nederland bv

Impuls 73-75
1446 BC
Nederland
TEL: +31 299 405 555
FAX: +31 299 642 581
www.digieu.eu